


SDIPRO-25

ASI, SD-SDI, HD-SDI Protector

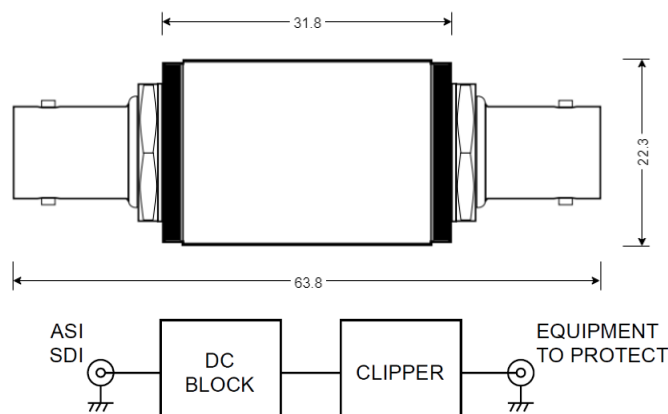

The high quality, professional and cost-effective solution

KEY FEATURES

- Protects equipment from damage by DC static and earth loop voltage build up
- Very low parallel capacitance
- Clipping function to protect equipment against spikes
- Suitable for ASI, SD-SDI and HD-SDI signals
- Compact and lightweight

TECHNICAL SPECIFICATIONS (typ. data)

Impedance	75Ω
Bandwidth	Up to 2.5GHz
Insertion loss	SD-SDI, ASI: < 0.1dB HD-SDI: 0.4dB
In/Out galvanic isolation	≥ 100V
Clipping	-1 / +3V <i>Standard ASI / SDI signals have 0.8Vpp amplitude; -1 / +3V are safe levels for most equipment</i>
Connectors	BNC female
Dimensions	63.8 mm x Ø 22.3 mm
Weight	29g

All specifications contained in this document may be changed without prior notice.

ABE ELETTRONICA

Via Leonardo da Vinci, 224 - 24043 Caravaggio (BG) - Italy
Tel. +39 0363 35 10 07 - Fax +39 0363 50 756 - mail@abe.it - www.abe.it

